

Tip-Up Bike Rack

Installation Guide



DISCOVER MORE

For more Saris
Infrastructure products,
scan the QR code or visit
[sarisinfrastructure.com](https://www.sarisinfrastructure.com)



Tell Us What You Think!



Sarisinfrastructure.com

Submit Your Installation Photos!

Nothing makes us happier than seeing our
infrastructure products out in the wild!

Submit your photos at the link below.

www.sarisinfrastructure.com/contact/submit-photos



Thanks for purchasing the Tip-Up Bike Rack!

Congratulations on choosing a world-class, space-saving solution to bike storage!

This compact bike rack saves space by allowing you to store your bikes vertically with an integrated lift-assist mechanism that makes loading a breeze.


Please be sure to read and understand the following instructions before beginning your installation.

Everyone here at Saris Infrastructure wants you to be happy with this product.

Please contact us at sales@saris.com or 608-729-6243 should you need anything.





Hook Installation

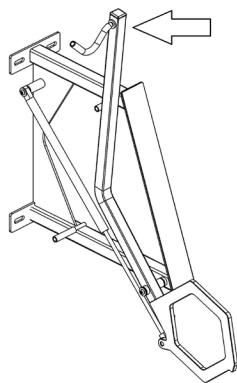


The Tip-Up arrives fully assembled aside from the wheel hook. This will need to be inserted and secured to the end of the lifting arm.

1. Insert Hook through end of Lifting Arm.
2. Using a pliers, secure the Hook by fastening the Circlip around the indentation at the Hook's base.

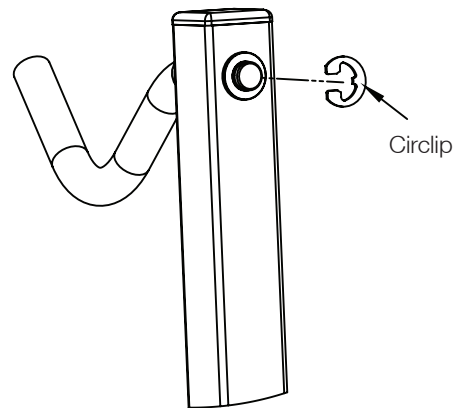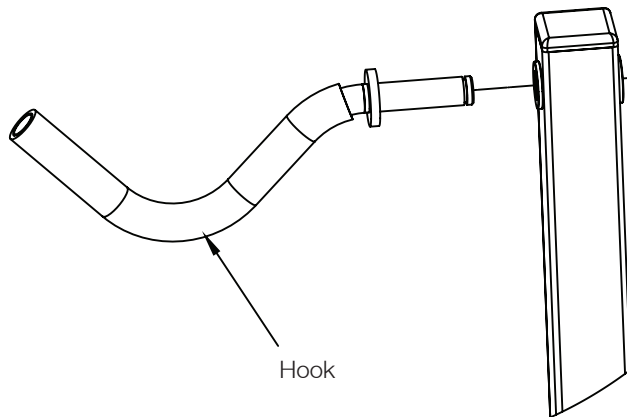


Mounting

Spacing and Mounting Height Recommendations

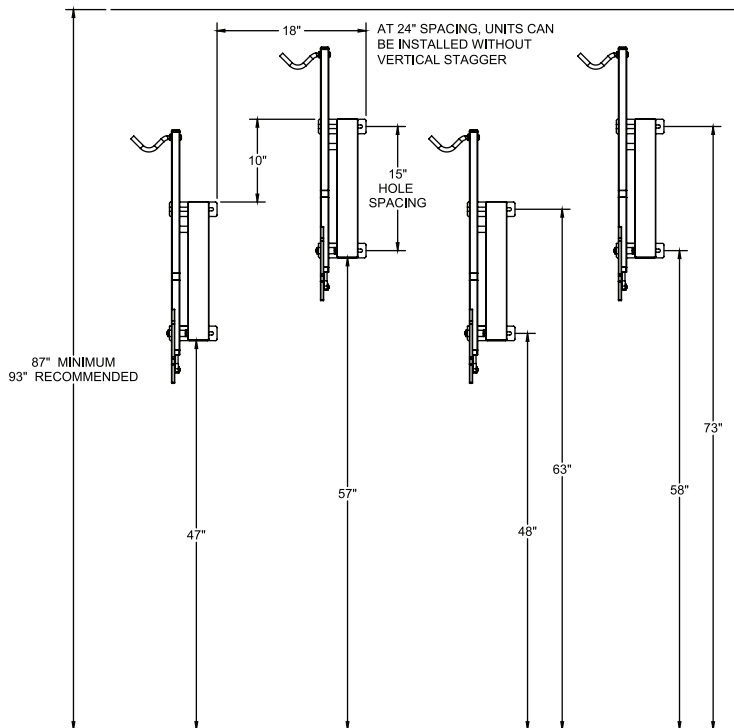

Mounting Bracket Dimensions

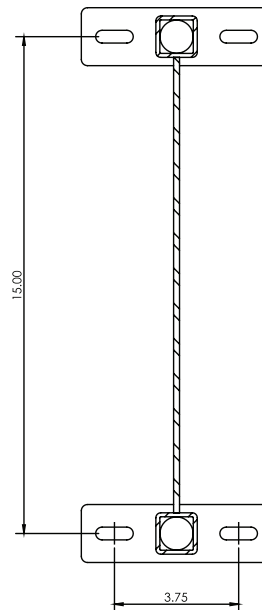

The Tip-Up can be mounted to any wall, corner, pillar, or post strong enough to hold the bikes.

Mounting hardware is not supplied. Before mounting to any surface, consult your local hardware store for applicable hardware.

Mounting of the Tip-Up to a solid surface is critical and beyond the control of the manufacturer

Operation



1 Pull down lifting arm into fully lowered position.



2 Place front wheel rim onto hook.



3 Grasp bike by seat and handlebars and pull backwards to initiate lifting mechanism.



4 Maintain grip on bike and guide into fully upright position.



5 To secure bike, insert bike lock through locking loop and bike's frame.

To unload, reverse steps 1-5.

WARRANTY

WARNING: Manufacturer and seller expressly disclaim any and all liability for personal injury, property damage or loss, whether direct, indirect, or incidental, resulting from the incorrect attachment or inappropriate placement, improper use, inadequate maintenance, or neglect of this product. Placement of this product is beyond control of the manufacturer. It is the end users reasonability to place this product so as to avoid potential pedestrian or playground accidents.

WARRANTY: We warrant this product to the first consumer to be free from defect in material and workmanship for a period of one year from date of purchase. Please retain your sales slip for your records. Any product or part thereof found to be defective within that period will be replaced without charge provided that: (1) the product was not misused; (2) no alterations or modifications were made; (3) its failure resulted from a defect in material or workmanship and not from normal wear expected in the use of the product; (4) the product or part is delivered, freight prepaid, to Saris Products. Manufacturer's only obligation shall be to replace such products or parts proved to be defective.

Saris Infrastructure 5253 Verona Road Madison, WI 53711 (800)783-7257 www.sarisinfrastructure.com